



NVLAP LAB CODE:201045-0



Shenzhen Anbotek Compliance Laboratory Limited

## IES LM-79-08 TEST REPORT

For  
LIGHT AND GREEN LLC

**Product Type:** RONDO

**Date of Receipt:** 2016-03-23

**Date of Test:** 2016-03-23 to 2016-03-30

**Date of Report:** 2016-03-31

**Product Model:** RM-D125


**Product Description:** AC 100-240V 50/60Hz 180W 3000K

**Product Criteria:** IES LM-79-08: Electrical and Photometric Measurements of Solid-State Lighting Products

**Prepared By:** Shenzhen Anbotek Compliance Laboratory Limited  
1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District,  
Shenzhen, Guangdong, China  
Tel: +86 755 2606 6544  
Fax: +86 755 26014772  
Web: www.anbotek.com

**Tested By:** Rain chen *Rain chen*

**Reviewed By:** Vic zhou/Energy Lab Manager *Vic. zhou*



Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or use in part without prior written consent from Shenzhen Anbotek Compliance Laboratory Limited. This report must not be used by the customer to claim product certification, approval, or endorsement By NVLAP, NIST, or any agency of the Federal Government.

## **TABLE OF CONTENTS**

1 – GENERAL.....	3
1.1 Product description.....	3
1.2 Standard of method.....	3
1.3 Test Facility.....	3
2 – Test Equipment List and Details.....	4
3 – Test Method.....	5
3.1 Ambient Condition.....	5
3.2 Power Supply Characteristics.....	5
3.3 Seasoning and Stabilization.....	5
3.4 Integrating Sphere System.....	5
3.5 Goniophotometer System.....	5
4 – Test Result.....	6
4.1 Photometric test with Integrating Sphere System.....	6
4.2 Photometric test with Goniophotometer System.....	9
5 – Additional Test.....	14
Attachment A – Product PHOTO.....	15

## 1 – GENERAL

### 1.1 Product description

#### General Information

<b>Applicant</b>	LIGHT AND GREEN LLC
<b>Applicant Address</b>	5222 VENILE BLVD LOSAN BELES CA 90019
<b>Manufacturer</b>	CHINA
<b>Manufacturer Address</b>	Minzhong Town, Zhongshan City, China
<b>Brand name</b>	LIGHT AND GREEN
<b>Test Model Number</b>	RM-D125
<b>Burning time before test</b>	0 Hours (For new products)

#### Rated Values

<b>Rated Inputs</b>	AC 100-240V 50/60Hz
<b>Rated Power</b>	180W
<b>Nominal CCT</b>	3000K

### 1.2 Standard of method

- ANSI C78.377-2011: Specifications for the Chromaticity of Solid State Lighting Products
- ANSI C82.77-2002: Harmonic Emission Limits-Related Power Quality Requirements for Lighting Equipment
- CIE Publication No.13.3-1995: Method of Measuring and Specifying Color Rendering of Light Sources
- IESNA LM-79-08 Approved Method: Electric & Photometric Measurement of Solid-state Lighting Products

### 1.3 Test Facility

The test facility used by Shenzhen Anbotek Compliance Laboratory Limited is located at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China.

## 2 – Test Equipment List and Details

Device	Manufacture	Model No	Serial No	Test Range	Calibration date
Goniophotometric System	SENSING	GMS-3000	-	-	2016-03-15
AC Power Source	Ainuo	AN97001W	-	0-300V, 1000VA	2016-03-15
Digital Power Meter	YOKOGAWA	WT310		0-600V/0-10A/0-100Hz	2016-03-15
Temperature & Humidity meter	XINIXI	CTH-608	-	0℃~50℃, 10% to 90%RH	2016-03-15
Total Luminous Flux Standard Lamp	SENSING	220V/500W	S135009	220V/500W	2016-03-15
Total Luminous Flux Standard Lamp	SENSING	220V/500W	S1350014	220V/500W	2016-03-15
1.5m Integral Sphere	SENSING	SPR-600M	-	380nm-780nm, 0.01lm~6.00×10 <sup>5</sup> lm	2016-03-15
Spectrum analyzer	SENSING	SPR-3000	-	380nm-780nm, 0.01lm~6.00×10 <sup>5</sup> lm	2016-03-15
AC Power Source	ALL POWER	APW-110N	997079	0-300V, 0-1000VA	2015-07-15
Digital Power Meter	YOKOGAWA	WT210	-	0-600V/0-10A/0-100Hz	2016-03-15
DC Power Supply	Linkcolor	Linkcolor	-	DC 30V, 5A	2016-03-15
Total Luminous Flux Standard Lamp	SENSING	110 V / 100 W	S13100190	Refer specification	2016-03-15
Total Luminous Flux Standard Lamp	SENSING	110 V / 100 W	S1310034	Refer specification	2016-03-15
Temperature & Humidity meter	XINIXI	CTH-608	-	0℃~50℃, 10% to 90%RH	2016-03-15

Statement of Traceability: Shenzhen Anbotek Compliance Laboratory Limited attests that all calibration has been performed using suitable standards traceable to national primary standards and International System of Unit (SI).

## **3 – Test Method**

---

### **3.1 Ambient Condition**

The ambient temperature in which measurements are being taken was maintained at  $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$ , the air flow around the sample(s) being tested did not affect the performance.

### **3.2 Power Supply Characteristics**

The AC power supply had a sinusoidal voltage wave shape at the prescribed frequency (60 Hz) such that the RMS summation of the harmonic components does not exceed 3 percent of the fundamental during operation of the test item.

The voltage of AC power supply (RMS voltage) applied to the device under test was regulated to within  $\pm 0.2$  percent under load.

### **3.3 Seasoning and Stabilization**

No seasoning was performed in accordance with IESNA LM-79-08. And before the measurement, the sample was stabilized until the light output and power variations were less than 0.5% in 30 minutes intervals (3 readings, 15 minutes apart).

### **3.4 Integrating Sphere System**

The system includes AC power source, digital power meter, DC power supply, spectrophotometer, and integrating sphere. The integrating sphere system is calibrated by standard light source before measurement. The system and standard light source has been calibrated regularly and traceable to the National Primary Standards.  $4\pi$  geometry was used during measurement. The product was operated in its intended orientation in application and was recorded in this report.

### **3.5 Goniophotometer System**

The goniophotometer system is calibrated by standard light source before measurement. The standard light source has been calibrated regularly and traceable to the National Primary Standards.

Type C goniophotometer was used for measuring total luminous flux, luminous intensity distribution, and color spatial uniformity. The product was operated in its intended orientation in application and was recorded in this report. The method according to IESNA LM-79-08 following chapter.

## 4 – Test Result

### 4.1 Photometric test with Integrating Sphere System

#### 4.1.1 Model: RM-D125

##### Electrical data

Input Voltage (V)	Frequency (Hz)	Input Current (A)	Power (W)	Power Factor
230.1	50	0.7916	174.96	0.961

##### Photometric data

Luminous Flux (lm)	Radiant Flux (W)	Efficacy (lm/W)	CCT (K)	Duv
14401.308	33.185	82.312	3024	-0.00034

##### Chromaticity Coordinate


x	y	u	v	u'	v'
0.4347	0.4025	0.2498	0.3469	0.2498	0.5204

##### Color Rendering Details


Ra
81.3


R1	R2	R3	R4	R5
80	91	95	77	79
R6	R7	R8	R9	R10
88	82	58	7	79
R11	R12	R13	R14	R15
74	69	83	98	73

## Spectral Distribution

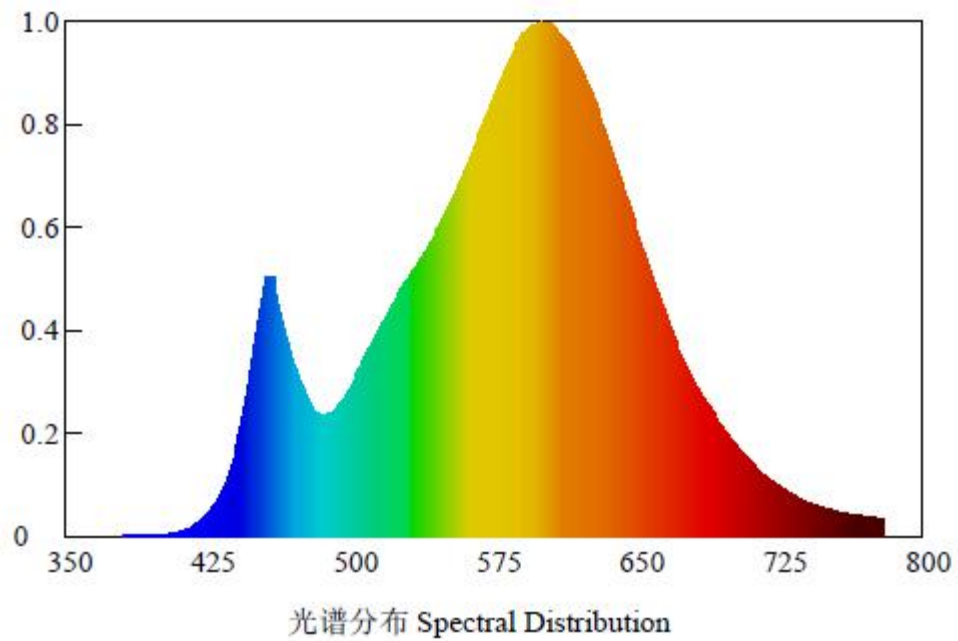

## Chromaticity Diagram (CIE 1931)

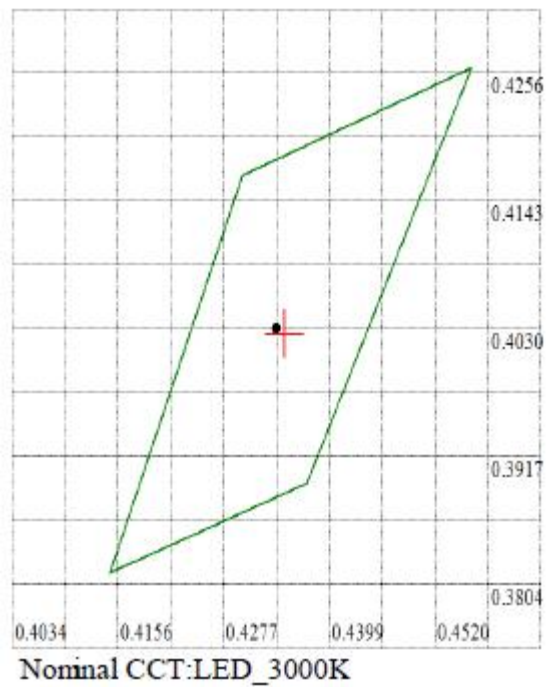

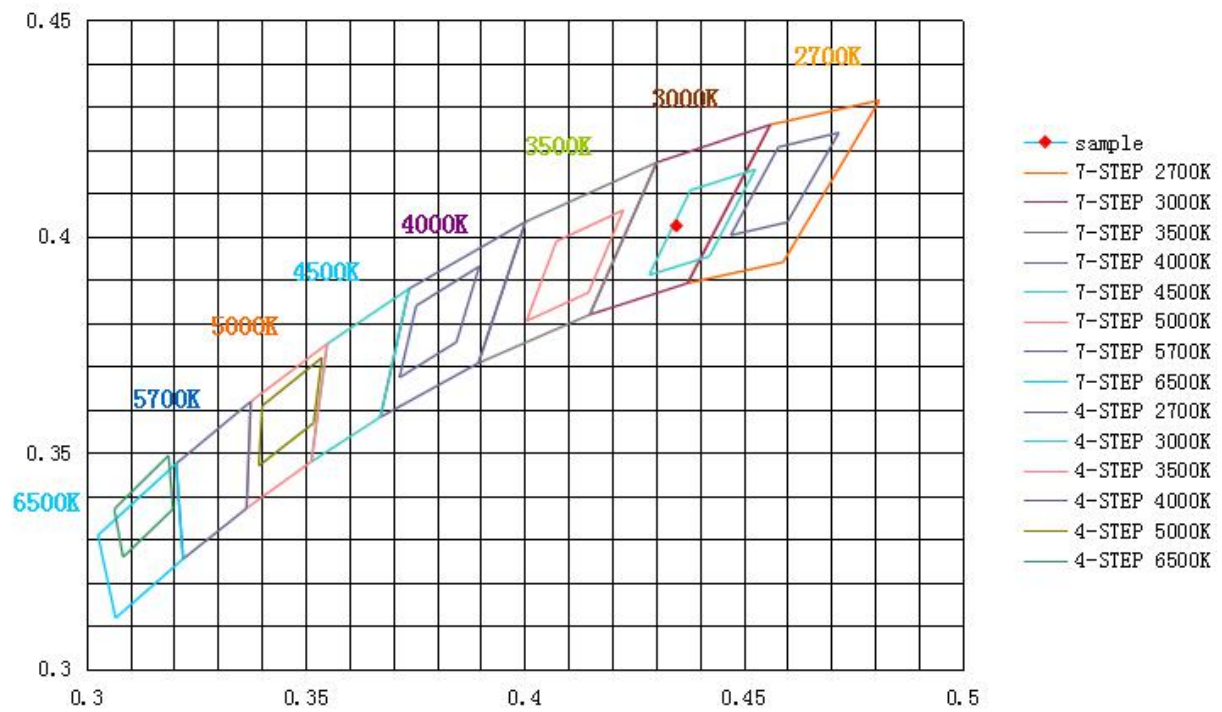**ANSI Chromaticity Quadrangles Diagram**



## 4.2 Photometric test with Goniophotometer System

### 4.2.1 Model: RM-D125

#### Electrical Measurement

Input Voltage (V)	Frequency (Hz)	Input Current (A)	Power (W)	Power Factor
230.09	50	0.7930	174.91	0.9583

#### Photometric Measurement


Luminous Flux (lm)	Efficacy (lm/W)	CBCP (cd)	Zonal Lumen Density(0~90° )
14599.98	83.47	5224.628	99.831%

**Zonal Lumen Summary****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Fixt
0-30	4011.20	27.47%
0-40	6528.46	44.72%
0-60	11420.95	78.23%
0-90	14575.30	99.83%
0-120	14585.44	99.90%
0-180	14599.99	100.00%
60-90	4260.04	29.18%
90-120	85.97	0.59%
90-130	89.51	0.61%
90-150	96.13	0.66%
90-180	100.39	0.69%
0-61.34	11679.99	80.00%

**ZONAL LUMEN SUMMARY**

0-10	493.40
10-20	1406.16
20-30	2111.65
30-40	2517.26
40-50	2577.69
50-60	2314.80
60-70	1777.08
70-80	1060.03
80-90	317.24
90-100	4.16
100-110	2.72
110-120	3.26
120-130	3.54
130-140	3.52
140-150	3.09
150-160	2.37
160-170	1.50
170-180	0.39

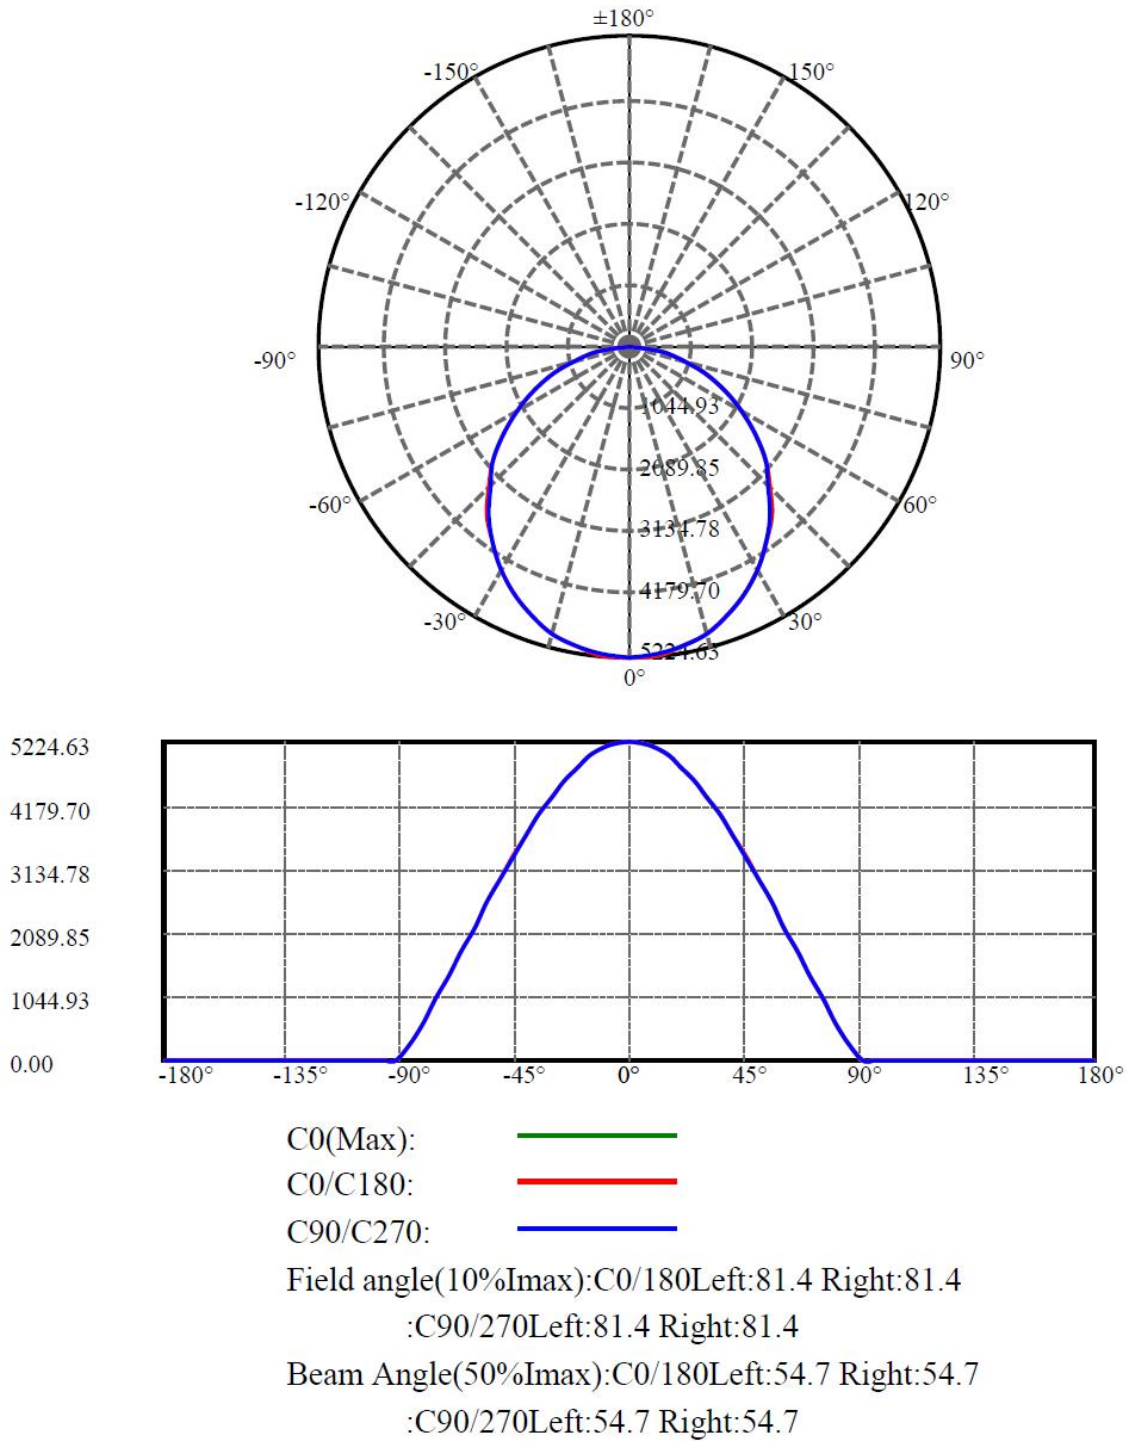**Light Distribution Curve [Unit: cd]**



**Luminous Intensity (cd) Distribution Data**

C/ $\gamma$ (°)	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0
0.0	5224.63	5197.69	5117.69	4986.25	4812.37	4578.90	4321.75	4029.49	3706.22
22.5	5223.00	5195.65	5116.87	4984.21	4806.66	4585.84	4320.11	4023.78	3696.02
45.0	5221.36	5194.83	5116.05	4985.85	4807.47	4584.61	4319.30	4021.33	3693.16
67.5	5221.36	5194.42	5115.24	4984.62	4804.62	4580.53	4320.93	4025.41	3698.87
90.0	5219.73	5193.61	5116.05	4982.17	4805.84	4586.24	4320.11	4028.68	3694.79
112.5	5221.36	5194.42	5115.24	4984.62	4804.62	4580.53	4320.93	4025.41	3698.87
135.0	5221.36	5194.83	5116.05	4985.85	4807.47	4584.61	4319.30	4021.33	3693.16
157.5	5221.36	5195.65	5116.87	4984.21	4806.66	4585.84	4320.11	4023.78	3696.02
180.0	5224.63	5197.69	5117.69	4986.25	4812.37	4578.90	4321.75	4029.49	3706.22
202.5	5223.00	5195.65	5116.87	4984.21	4806.66	4585.84	4320.11	4023.78	3696.02
225.0	5221.36	5194.83	5116.05	4985.85	4807.47	4584.61	4319.30	4021.33	3693.16
247.5	5221.36	5194.42	5115.24	4984.62	4804.62	4580.53	4320.93	4025.41	3698.87
270.0	5219.73	5193.61	5116.05	4982.17	4805.84	4586.24	4320.11	4028.68	3694.79
292.5	5221.36	5194.42	5115.24	4984.62	4804.62	4580.53	4320.93	4025.41	3698.87
315.0	5221.36	5194.83	5116.05	4985.85	4807.47	4584.61	4319.30	4021.33	3693.16
337.5	5221.36	5195.65	5116.87	4984.21	4806.66	4585.84	4320.11	4023.78	3696.02
360.0	5224.63	5197.69	5117.69	4986.25	4812.37	4578.90	4321.75	4029.49	3706.22
C/ $\gamma$ (°)	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0
0.0	3345.40	2977.14	2586.84	2187.00	1794.82	1390.49	1005.09	621.65	267.19
22.5	3336.58	2967.43	2587.29	2200.18	1794.91	1390.85	996.88	621.69	269.31
45.0	3365.27	2973.02	2584.15	2196.71	1795.27	1391.22	1006.56	619.36	270.50
67.5	3319.76	2973.71	2591.25	2197.32	1792.58	1395.43	1001.50	617.85	266.46
90.0	3312.17	2978.69	2590.27	2189.94	1797.19	1394.49	1003.70	619.61	268.82
112.5	3319.76	2973.71	2591.25	2197.32	1792.58	1395.43	1001.50	617.85	266.46
135.0	3365.27	2973.02	2584.15	2196.71	1795.27	1391.22	1006.56	619.36	270.50
157.5	3336.58	2967.43	2587.29	2200.18	1794.91	1390.85	996.88	621.69	269.31
180.0	3345.40	2977.14	2586.84	2187.00	1794.82	1390.49	1005.09	621.65	267.19
202.5	3336.58	2967.43	2587.29	2200.18	1794.91	1390.85	996.88	621.69	269.31
225.0	3365.27	2973.02	2584.15	2196.71	1795.27	1391.22	1006.56	619.36	270.50
247.5	3319.76	2973.71	2591.25	2197.32	1792.58	1395.43	1001.50	617.85	266.46
270.0	3312.17	2978.69	2590.27	2189.94	1797.19	1394.49	1003.70	619.61	268.82
292.5	3319.76	2973.71	2591.25	2197.32	1792.58	1395.43	1001.50	617.85	266.46
315.0	3365.27	2973.02	2584.15	2196.71	1795.27	1391.22	1006.56	619.36	270.50
337.5	3336.58	2967.43	2587.29	2200.18	1794.91	1390.85	996.88	621.69	269.31
360.0	3345.40	2977.14	2586.84	2187.00	1794.82	1390.49	1005.09	621.65	267.19
C/ $\gamma$ (°)	90.0	95.0	100.0	105.0	110.0	115.0	120.0	125.0	130.0
0.0	7.51	2.20	2.29	2.45	2.78	3.27	3.59	3.92	4.16
22.5	8.94	2.29	2.29	2.53	2.86	3.22	3.55	3.92	4.16
45.0	8.04	2.29	2.29	2.45	2.98	3.27	3.59	4.04	4.12
67.5	8.29	2.29	2.37	2.61	2.94	3.27	3.84	3.92	4.25
90.0	8.98	2.20	2.45	2.61	3.02	3.43	3.76	4.00	4.57
112.5	8.29	2.29	2.37	2.61	2.94	3.27	3.84	3.92	4.25
135.0	8.04	2.29	2.29	2.45	2.98	3.27	3.59	4.04	4.12
157.5	8.94	2.29	2.29	2.53	2.86	3.22	3.55	3.92	4.16
180.0	7.51	2.20	2.29	2.45	2.78	3.27	3.59	3.92	4.16
202.5	8.94	2.29	2.29	2.53	2.86	3.22	3.55	3.92	4.16
225.0	8.04	2.29	2.29	2.45	2.98	3.27	3.59	4.04	4.12
247.5	8.29	2.29	2.37	2.61	2.94	3.27	3.84	3.92	4.25
270.0	8.98	2.20	2.45	2.61	3.02	3.43	3.76	4.00	4.57
292.5	8.29	2.29	2.37	2.61	2.94	3.27	3.84	3.92	4.25
315.0	8.04	2.29	2.29	2.45	2.98	3.27	3.59	4.04	4.12
337.5	8.94	2.29	2.29	2.53	2.86	3.22	3.55	3.92	4.16
360.0	7.51	2.20	2.29	2.45	2.78	3.27	3.59	3.92	4.16

C/ $\gamma$ (°)	135.0	140.0	145.0	150.0	155.0	160.0	165.0	170.0	175.0
0.0	4.49	4.90	4.90	4.98	4.98	5.06	5.71	5.39	5.39
22.5	4.57	4.73	4.82	4.98	4.98	5.18	5.27	5.35	5.63
45.0	4.78	4.69	4.98	4.94	5.18	5.18	5.31	5.27	5.39
67.5	4.53	4.82	5.06	5.18	5.14	5.39	5.22	5.43	5.43
90.0	4.65	4.82	4.98	5.14	5.31	5.55	5.22	5.14	5.22
112.5	4.53	4.82	5.06	5.18	5.14	5.39	5.22	5.43	5.43
135.0	4.78	4.69	4.98	4.94	5.18	5.18	5.31	5.27	5.39
157.5	4.57	4.73	4.82	4.98	4.98	5.18	5.27	5.35	5.63
180.0	4.49	4.90	4.90	4.98	4.98	5.06	5.71	5.39	5.39
202.5	4.57	4.73	4.82	4.98	4.98	5.18	5.27	5.35	5.63
225.0	4.78	4.69	4.98	4.94	5.18	5.18	5.31	5.27	5.39
247.5	4.53	4.82	5.06	5.18	5.14	5.39	5.22	5.43	5.43
270.0	4.65	4.82	4.98	5.14	5.31	5.55	5.22	5.14	5.22
292.5	4.53	4.82	5.06	5.18	5.14	5.39	5.22	5.43	5.43
315.0	4.78	4.69	4.98	4.94	5.18	5.18	5.31	5.27	5.39
337.5	4.57	4.73	4.82	4.98	4.98	5.18	5.27	5.35	5.63
360.0	4.49	4.90	4.90	4.98	4.98	5.06	5.71	5.39	5.39

C/ $\gamma$ (°)	180.0
0.0	5.55
22.5	5.55
45.0	5.47
67.5	5.31
90.0	5.39
112.5	5.31
135.0	5.47
157.5	5.55
180.0	5.55
202.5	5.55
225.0	5.47
247.5	5.31
270.0	5.39
292.5	5.31
315.0	5.47
337.5	5.55
360.0	5.55

---

**5 – Additional Test**

---

Test item	Test Voltage (V)	Frequency(Hz)	Test Result
Total harmonic Distortion	230	50	9.47%

*The test data was only good for the test sample. It may have deviation for other test sample.*




---

**Attachment A – Product PHOTO**

---



**PHOTO 1**

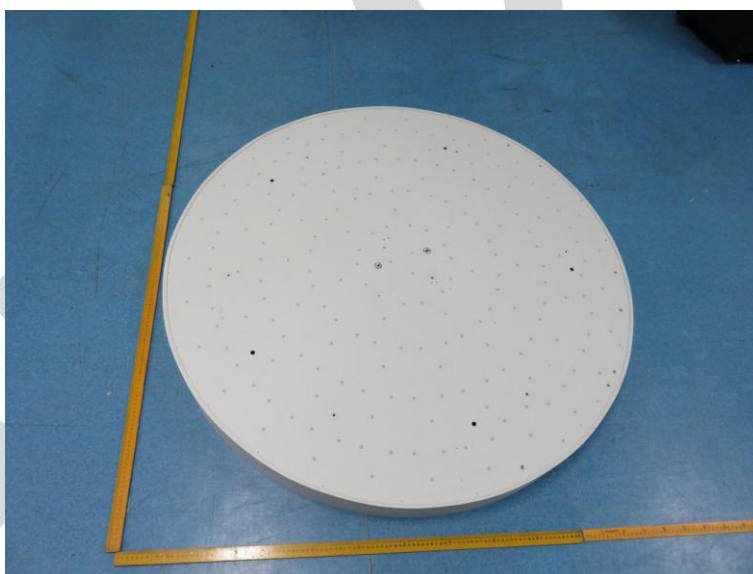

**PHOTO 2**

-----End of Report-----