

Your Logo / Info Here

Project Information


Fixture Type: _____

Project Name: _____

Location: _____

LG-7015TL

Nonadjustable Trimless Downlight LED

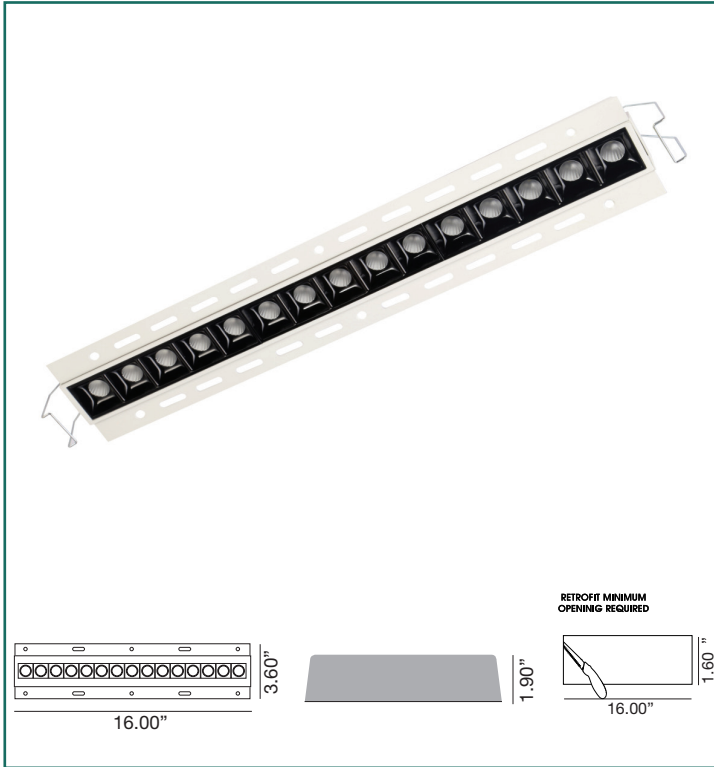

Lamp Details	
WATTAGE	30W (15 x 2W)
CRI	90
BEAM SPREAD	15/30/45
CLASS	CLASS 1
POWER SUPPLY	CONSTANT CURRENT
VOLTAGE	120V
CURRENT	600MA
COLOR TEMP	30K
IC AIRTIGHT	YES
LUMENS / BLACK BEVEL	1666
LUMENS/WHITE LEVEL	2083
DIMMING	TRIAC
LED TYPE	OSRAM
DRIVER	Included

Product Description

Revolutionary narrow recessed downlight available in slim trim or trimless.

The simplified retrofit installation can be used in both new and existing spaces.

LED Lighting Engine High performance, low power LEDs provide outstanding reliability, performance and color quality/consistency 3000k color temperature available with 90+ CRI.

- Life Rated for 30,000 hours at 70% lumen maintenance
- All testing reports are based on published industry procedures

Product Features

- Revolutionary flush mounted trimless design offers consistent aesthetics
- Energy efficient LED light engines
- Dimmable with a variety of commonly used drivers
- Fixtures can be used with all Smart House Systems such as Lutron, Vantage, Control4, Crestron and others
- Easy installation for new construction and remodel applications
- Class 1
- IC Rated UL approved fixtures
- Damp location and Air tight Rated
- Driver included

Your Logo / Info Here

Project Information

Fixture Type: _____

Project Name: _____

Location: _____

LG-7015TL Nonadjustable Trimless Downlight LED



Ordering Guide

LG-7015TL -

Frame Color

* Standard
Lamp Color
***WH= White**
BL= Black

Bevel Color

* Standard
Lamp Color
BWH= White
***BBL= Black**

Temperature

* Standard
Temperature Color
27K= 2700K
***30K= 3000K**
35K= 3500K

Beam Spread

* Standard Beam Spread Angle

15°

***30°**

45°

* Standard

Comments: