Your Logo / Info Here

Project Information

Fixture Type: _____

Project Name: _____

Location: _____

LG-8011 6" LED Adjustable

Technical Info

AR111 LAMP TYPE		
LAMP MODULE DETAILS	CL2-15W	CL2-15QLG111
WATTAGE	15W	25-40W
CRI	95	90
BEAM SPREAD	11/17/26/42	16/20
CLASS	CLASS 2	CLASS 2
POWER SUPPLY	CONSTANT CURRENT	CONSTANT CURRENT
VOLTAGE	36VD C	48VD C
CURRENT	350	350/500/700MA*
COLOR TEMP	27K/90K/40K	27K/30K/40K
IC AIRTIGHT	YES	YES
LUMENS	1820	UP TO 3200*
DIMMING	TRIAC	DMX512
LED TYPE	CREE	LUXEON RGBW

Product Description

The Harmony LED Plaster Recessed Light

Revolutionary Plaster light fixture, which allows a true seamless and trimless installation. The fixtures are paintable using standard paint and paint colors.

LED Lighting Engine High performance, low power LEDs provide outstanding reliability, performance and color quality/consistency 2700k, 3000k, 4000k, color temperatures available with 90+ CRI.

- Fixtures are offered with a choice of spot, narrow flood or flood beam pattern
- Life Rated for 30,000 hours at 70% lumen maintenance
- All testing reports are based on published industry procedures

Product Features

- Revolutionary flush mounted trimless & seamless design which offers consistent aesthetics
- Made out of Environmentally Friendly Plaster Materials
- Our plaster fixture can be painted fast and easy by simply using your standard paint colors.
- Energy efficient LED light engines
- Versatile field changeable optics
- Dimmable with a variety of commonly used drivers
- Fixtures can be used with all Smart House Systems such as Lutron, Vantage, Control4, Crestron and others
- Easy installation for new construction and remodel applications
- IC Rated UL approved fixtures
- Damp location & Air tight Rated
- Chicago Plenum Rated
- Dimming Driver Not included

*Download full QLG Luminaires data sheet at our website

Your Logo / Info Here

Project Information

Fixture Type: _____

Project Name: _____

Location: _____

LG-8011 6" LED Adjustable

Optional Lenses & Diffusers

Frosted

Middle Frosted

Lens Holder

Flat Black or White

Optional Optics

11° Light Beam Insert

17° Light Beam Insert

26° Light Beam Insert

Your Logo / Info Here

Project Information

Fixture Type: _____

Project Name: _____

Location: _____

LG-8011 6" LED Adjustable

Ordering Guide

LG-8011 - [ ] - [ ] - [ ] - [ ] - [42°] - [ ]

* Standard Items

Lamp Holder
Indicate Lamp Holder Color Selection
WH= White
BL= Black

Lamp Module
Select Desired Lamp Module
CL2-15W
CL2-15QLG*

Lamp Color
Select Desired Lamp Color
WH= White
BL= Black

Temperature
Select Desired Temperature Color
27K= 2700K
30K= 3000K
40K= 4000K

Beam Spread
Standard Beam Spread Angle
42°

Dimming Options
(all built in)
Traiac/ELV
Eco-PEQ0E
0-10
Dali

Additional Option
For remote driver only

PEQ0E | PEQ0 | 100% – 0.1%
Hi-lume Premier 0.1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology

Additional Accessories

OPTIONS - [ ] - [FL] - [ ] - [ ] - [ ]

Optional Lens
Indicate desired optional lens
FR= Frosted
MF= Middle Frosted

Lens Holder
Standard lens holder
FL= Flat

Holder Color
Indicate desired lens holder color
WH= White
BL= Black

Optional Optics
Indicate desired optics replacement angle beam
11°
17°
26°
18° (QLG)*
20°(QLG)*

*Download QLG Luminaire data sheet to see all available options.

Comments:

©2010-2018 Light & Green. Design and specifications subject to change without notice.

LIGHT & GREEN
• HANDCRAFTED PLASTER LIGHT FIXTURES •

Wiring Diagrams for Class 2 - 8000 Series

Single Fixture & Daisy Chain Options

Single Fixture Wiring

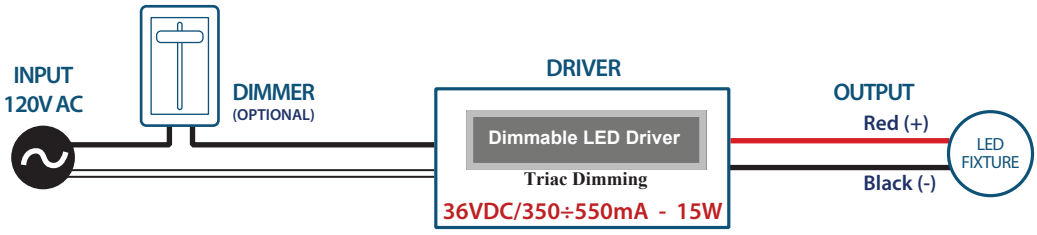

Two Fixtures Wiring

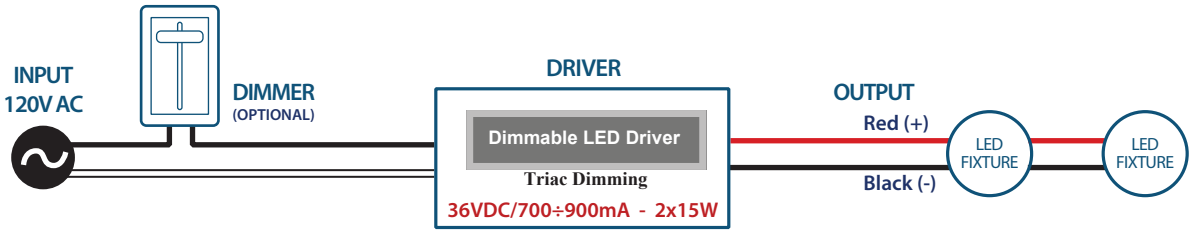
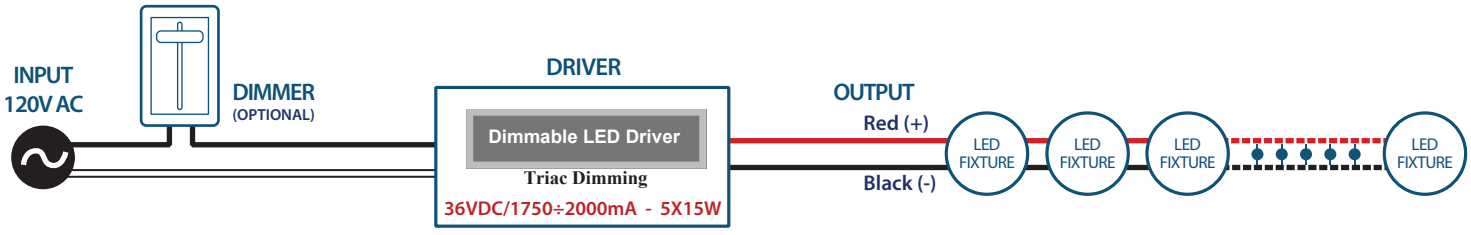
Nine Fixtures Wiring