Light and Green LLC

LG-9020

This trim have to use only with housing no.1001





Cut a hole on the ceiling
(about 5mm bigger than the product size)

1 OFF

Lock the perforated bracket on trim
according to the thickness of the ceiling

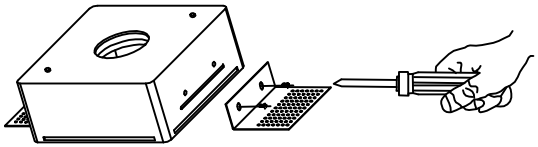

2

Output wire on driver:min24 #
Red wire connect positive pole

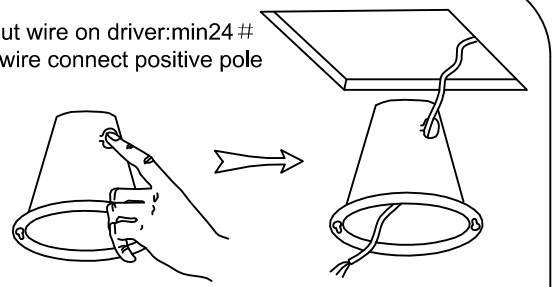

3 Black wire connect negative pole
Use current constant driver:250mA 36V



4 Fix the housing on the back side of the trim



Put trim into the ceiling

5

From the front,screw through the ceiling to fix the
perforated brackets ,then trim fixed on the ceiling

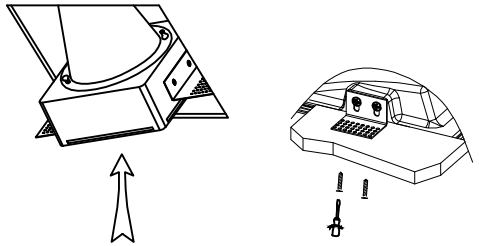

6

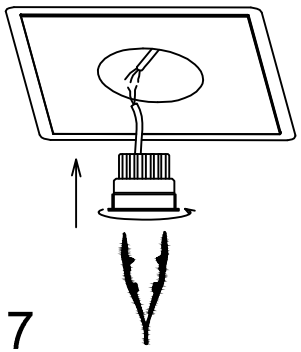

Connect driver with
the LED lamp

Red wire connect
positive pole

Black wire connect
negative pole

DC:36V.
Constant:250mA

7

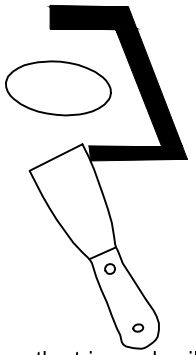

8 Fill the gap between the trim and ceiling



9 ON